



煤矿用隔爆型振动电机

型号规格	代号50Hz	额定激振力	额定激振功率	额定电压	效率	外形尺寸												机座号	图号
		kN	kW	V	%	A	B	G	F	C	D	E	H	I	L	M	N		
YBZD32-2	MVE3200/3D	22	2.2		80					554						125			
YBZD38-2	MVE3800/3D	28	2.8		82					584						125			
YBZD38-4	MVE3800/15D	38	1.72		81					618						157			
YBZD38-2	MVE3800/3D	38	3.3		83	155	255	Φ23.5	30	618	315	404	150	280	304	Φ264	75H	图1	
YBZD43-4	MVE4300/15D	43	1.94		81					618									
YBZD26-6	MVE2600/1D	26	1.6		81					740						218			
YBZD30-6	MVE3000/1D	30	1.8		81					740						218			
YBZD21-8	MVE2100/075D	15	1		72					740									
YBZD31-8	MVE3100/075D	31	3		74					602						167.5			
YBZD55-4	MVE5500/15D	55	2.2		80	180	280	Φ28	30	618	315	404	150	280	304	Φ264	75H	图1	
YBZD47-6	MVE4700/15D	47	2.2		77					745						193.5			
YBZD38-8	MVE3800/075D	25	2.25		77					745						193.5			
YBZD52-6	MVE5201/1D	52	2.3		77					704						170			
YBZD42-8	MVE4201/075D	30	3	380/660	76					704						180			
YBZD53-8	MVE5301/075D	35	3.3	380 (△) 660 (Y)	84					774						205			
YBZD65-8	MVE6501/075D	45	3.3		84					774						205			
YBZD65-6	MVE6501/1D	65	3.3		80					704						170			
YBZD72-6	MVE7201/15D	72	3.3		80					774	385	487	202			205	Φ274	Φ850	图1
YBZD65-2	MVE6501/3D	65	4.4		78					624						180			
YBZD72-4	MVE7201/15D	72	5		82					624									
YBZD90-6	MVE9001/15D	90	5		83					624									
YBZD90-2	MVE9001/3D	90	5.4		86					624						180			
YBZD88-8	MVE8801/1D	88	4		85					774						205			
YBZD90-6	MVE9001/1D	90	4		83					774						205			
YBZD100-6	MVE10001/1D	100	3.3		85					908						260			
YBZD114-6	MVE11401/1D	114	5.5		85					908						260			
YBZD100-4	MVE10001/15D	100	3.8		86	1235	360	Φ35	40	720	450	500	205	204	200	175	Φ274		
YBZD100-8	MVE10001/075D	100	5		81					740						218			
YBZD130-6	MVE13001/1D	130	7.5		87					940						280			

煤矿用隔爆型振动电机

应用优势

高可靠性与寿命、无接触电阻、使用寿命长、维护简单、体积小、重量轻、安装方便。

产品特点

额定电压 380/660V

本公司矿用隔爆型振动电机产品主要符合以下特点：

额定功率 0.25~100kW

IP 54

工作制 S1

海拔 ≤1000m

环境温度 -20℃~40℃

极数4极
表示激振力为3.8kN
振动电机
隔爆型
三相异步电动机

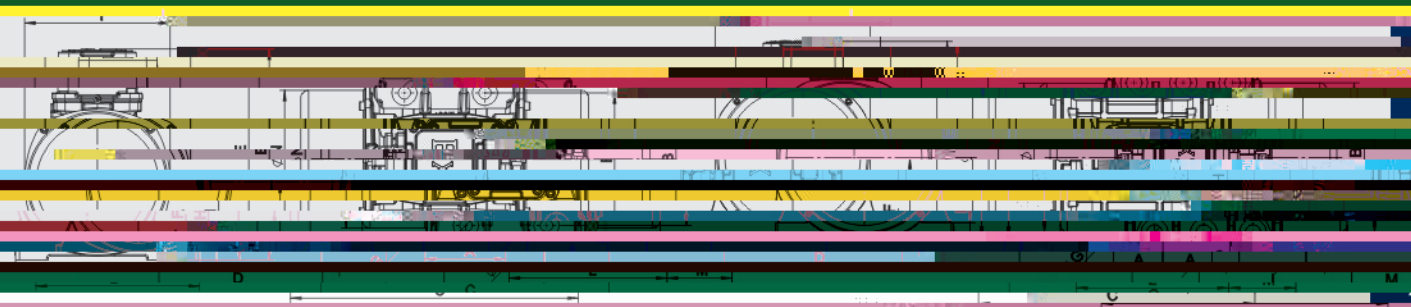


图1

图2